

PATENT ABSTRACTS OF JAPAN

(11) Publication number: 02110660 A

(43) Date of publication of application: 23 . 04 . 90

(51) Int. CI

G06F 15/28 H04N 7/08

(21) Application number: 63263421

(22) Date of filing: 19 . 10 . 88

(71) Applicant:

FUJITSU GENERAL LTD

(72) Inventor:

SUZUKI YASUSHI KAKIMOTO KOJI MINAMI YUJI HASHIMOTO JUNICHI YAMANE KENICHI

INAMI MASAHIKO

(54) HOME BETTING DEVICE


(57) Abstract:

PURPOSE: To shorten the time for using a telephone line when a betting ticket is purchased by displaying horse race information by teletext and information by a display processing means on the screen of a television and transmitting betting data to a selling side by a winning horse betting setting means.

CONSTITUTION: Information about a race horse in a prescribed race stored in a RAM part 7 such as the weight, the odds, and the race result of the race horse is displayed on the screen, on which a teletext horse race program, etc., received by a teletext receiving part 2 are to be displayed, by a CPU 9. Further, when winning horse betting is executed by operating a remote key pad (RKP) remote controller 4, winning horse betting data are stored in a RAM 15 of a winning horse betting control part 3, a winning horse number to be purchased. a purchased amount, and an approximate paying back rate and a popularity rank at a current point by the teletext are displayed on the screen, and winning horse betting ticket purchase data are collectively transmitted through an I/F part 24, a modern part 17, a network control unit (NCU) 16 to the winning horse

betting ticket selling side by the telephone line in a packet system.

COPYRIGHT: (C)1990, JPO& Japio



◎ 公 開 特 許 公 報 (A) 平2-110660

Int. Cl. 5

識別記号

庁内整理番号

43公開 平成2年(1990)4月23日

G 06 F 15/28 H 04 N 7/08 A 7165-5B A 8838-5C

審査請求 未請求 請求項の数 6 (全18頁)

69発明の名称 在宅投票装置

②特 願 昭63-263421

愛出 願 昭63(1988)10月19日

@発 明 者 鈴 木 恭 神奈川県川崎市高津区末長1116番地 株式会社富士通ゼネ

ラル内

⑩発 明 者 柿 本 浩 二 神奈川県川崎市高津区末長1116番地 株式会社富士通ゼネ

ラル内

⑩発 明 者 南 裕 治 神奈川県川崎市高津区末長1116番地 株式会社富士通ゼネ

ラル内

⑦出 願 人 株式会社富士通ゼネラ 神奈川県川崎市高津区末長1116番地

ル

四代 理 人 弁理士 大原 拓也

最終頁に続く

明 郵 聲

1. 発明の名称

在宅投票装置

2. 特許請求の範囲

(1) アンテナにて受けたテレビ信号より、所定 チャネルの文字放送を受信し、その文字放送の競 馬番組等を映像信号に変換してテレビジョン等に 出力する文字放送受信手段と、

勝馬投票に必要な情報のデータを記憶する記憶 手段と、この記憶手段に記憶されている情報に基づいて、前記テレビジョンの画面に必要な情報を 投票の勝馬番号、購入金額および呼延番号(ID)等 を設定する勝馬投票設定手段と、この勝馬投票設 定手段にて設定された勝馬投票を延話回線を介し て勝馬投票券免売側に送信する勝馬投票送信手段 とから構成される勝馬投票手段とを有し、

前記勝馬投票に際し、前記テレビジョンの画面に、文字放送による競馬協報を表示すると共に、前記表示処理手段にて得られた競馬情報や前記勝

馬投票設定手段にて投票された勝馬投票番号等を 表示し、かつ、その勝馬投票のデータを前記勝馬 投票券免売側に送信し、その勝馬投票が行なえる ようにしたことを特徴とする在宅投票数据。

- (2) 前記表示処理手段は競馬場名および勝馬投 選券の当日発売あるいは前日発売を前記画面に設 示し、前記勝馬投票設定手段にて所定競馬場およ で発売日を設定するようにした請求項(1)記載の 在宅投票装置。
 - (3) 前記設示処理手段は、前記勝場投票設定手段にて設定された勝馬投票の番号、および購入金額と、前記文字放送の政新競馬情報に基づいてその勝馬投票番号の概算払戻率および人気順位を前記画面に表示するようにした請求項(1)記載の在宅投票装置。
- (4) 前記表示処理手段は、前記勝馬投票設定手段にて設定された連勝、単勝および損務の勝馬投票番号、その購入金額および合計金額等を表示するようにした請求項(1)記載の在宅投票装置。
 - (5) 前記勝馬投旗送倡手段は前記勝馬投旗設定

手段にて設定された勝馬投票のレース番号、勝馬番号、購入枚数(金額)、当該在宅投票装置の加入番号と暗証番号およびその他勝馬投票に必要なデータを前記勝馬投票券免売網に一括して送信するようにした請求項(1)記載の在宅投票装置。

(6) 前記應馬投票設定手段はリモコンであり、 前記勝馬投票制御手段には、そのリモコン信号を 受ける受光手段が設けられている請求項(1)記載 の任宅投票装置。

3. 発明の詳細な説明

[遊楽上の利用分野]

この発明は、電話回線を介して勝馬投媒ができる在宅投票装置に係り、更に詳しくは文字放送の競馬番組を受信し、競馬番組あるいはその競馬番組よりの競馬情報を設示して、勝馬投票の参考にすることができ、その勝馬投票券購入時における電話回線の使用時間を減少させることができる在宅投票装置に関するものである。

[從來例]

従来、勝馬投票券を購入する場合、開機競馬場

終を人力するようなっている。そのため、勝馬投 照に時間がかかり、電話回線の使用時間が及くな ってしまうという問題点があった。しかも、発券 側コンピュータと接続できる電話回線数が決まっ ているため、その発券側コンピュータと接続が行 なわれない場合もあり、特にレースの難切時間近 なわれない場合もあり、特にレースの難切時間近 くになると、購入者が役到することもあって、勝 馬投展券が購入できないケースもある。

また、CRT方式は、加入者が電話投資所の係 はと直接電話で勝馬投票が購入の申し込みを行な うようになっている。この場合、係員は陰梗終管 (CRT)に設示された勝馬データを基に加入者に 応答し、勝馬投票の申し込みを受け、投票券を購入することになる。しかし、口頭による購入で聘 人することになる。しかし、口頭による関係の明 人することになる。しかし、口頭による関係の明 人することになる。しかり、口頭による関係の明 人することになる。しかり、上記同様の明 の点からその明人に時間がかかり、上記同様の問 題点があった。

一方、ファンにとって勝馬投票券を購入するに 際し、競馬専門紙と共に、概算払戻率(オッズ等)

この電話投票システムにはARS方式、 CRT方式があり、これらはシステム加入者が主催者側と契約を結び、例えば主催者側の指定する銀行に本人名義の普通低金を開設し、同時に定期低金(例えば銀過10万、20万、30万等)を設け、一方主催側がその低金を担保として限り、その金額を勝馬投票の購入限度額に決めている。これにより、その加入者である遠隔地のファンは地話で、所望の勝馬投票券を購入することができる。

[発明が解決しようとする課題]

ところで、上記世話投票システムおいて、 A R S 方式は、加入省がブッシュフォン電話機のボタンを操作し、勝馬投票の発券側コンピュータと接続してから、さらに所定ボタン操作により投票内

の情報が極めて重要な参考資料である。しかし、 関値されている競馬場に直接行っている者には、 場内のオッズ掲示板にてその情報を知ることがで きるが、在宅投票者には、例えばラジオ放送、テ レビ放送等によるオッズ情報を参考にするしかな い。

しかしながら、それら放送は、希望する時刻に そのオッズ等の必要な情報を教えてくれるとは限 らないため、購入者にとっては不便な点が多々あ った。

この発明は上記問題点に選みなされたものであり、その目的は勝馬投票券の購入時における世話回線の使用時間を短くすることができ、より多くのファンによる勝馬投票券の購入を可能とすると共に、オッズ等の競馬情報を必要に応じて得ることができるようにした在宅投票装置を提供することにある。

[課題を解決するための手段]

上記目的を選成するために、この発明の在宅投 類装置は、アンテナにて受けたテレビ倡号より、 際し、上記テレビジョンの画面に、文字放送による競馬情報を表示すると共に、上記表示処理手段

にて得られた競馬情報や前記勝馬投票設定手段に

て投票された防馬投票番号等を表示し、かつ、そ

の勝馬投票のデータを前記勝馬投票券発売側に送信し、その勝馬投票が行なえるようにしたことを

[作 用]

更好とするものである。

このように、上記画面に表示されている勝馬投票に間違いないことを確認した上で、勝馬投票送信手段を制御することにより、所定勝馬投票券免 党側と間で通信が開始される。すなわち、当該任宅投票装置からの勝馬投票券購入データが進話回線を介してパケット形式で一括に送信されるため、その電話回線の使用時間が短くて済み、より多くの在宅投票装置がその勝馬投票券発売側と回線接続されるようになる。

[实 施 例]

以下、この発明の実施例を図面に基づいて説明する。

第1回乃至第4回において、この在宅投票装置 には、アンテナ1にで受けたテレビ放送の文字放送を受信し、その文字放送をテレビジョンの画面 等に表示する文字放送受信部2と、勝馬投票のための勝馬番号や購入金額を設定する設定機能、文字放送の競馬番組よりの競馬情報(オッズ等)および勝馬投票に必要な情報を上記画面に表示するための表示処理機能、勝馬投票券購入データを電話

上記機成としたので、上記文字放送受信部にて 受信された文字放送の競馬番組等が表示される画 面には、上記記位手段に記憶されている勝馬投票 に必要な情報、所定レースにおける競走馬の体重、 オッズ(遊歴、単層および復勝)およびレース結果 等が表示される。そのような競馬情報を参考とし て、上記勝馬投票設定手段(RKP;リモコン)にて勝 周投票操作を行なうと、上記画面にはその勝馬投 界に必要なメッセージが殺示される。 そのメッセ ージにしたがってその勝馬投票設定手段を操作す ることにより、上記画面には購入する醫爲番号、 迎勝であれば「1-3」、単語あるいは視勝であれ ば「16」が表示され、さらにその番号の並びに勝入 金額「10,000」が表示される。しかも、その頭面に は、現時点における購入勝馬投票番号の概算払展 半と人気順が表示される。また、上記勝馬投票数 定手段にてその勝馬投票の取り消し、 変更(レー ス、勝馬番号、購入金額等)を行なうと、上記画 面に表示されている勝馬投票番号、購入金額等が 消え、あるいは変更される。

回線を介して勝馬投票券発売センター側に送信する送信機能、その勝馬投票券の当たり等を問合せる駅会機能およびリモコン信号にて動作するリモコン機能等を有する勝馬投票制御部3とが設けられている。この実施例においては、この在宅投票装置はRKP(リモート キー パット;リモコン)4の操作により動作するようになっている。

文字放送受信部2には、所定チャネルのテレビ放送、文字放送を受信して映像信号を取り出すチューナ部5と、その映像信号より文字放送データを取り出すDRT(Data Regenerator for Tele-text)部6と、その文字放送データを記憶するRAM部7と、回示しないテレビジョン画面の表示データや音声データが記憶される共有メモリ部8と、それらデータの読み出し、書き込みおよび転送等の制御を行なうCPU(マイクロコンピュータ)9と、このCPU9の制御プログラム等が記憶されているROM部10と、DRT部6、RAM部7、共有メモリ部8、CPU9およびROM部10等を接続するバス11と、CPU9あるいは後述するCPU18からの命令にて上記共有

メモリ部8に記憶されている表示/音声データを映像/作声信号として出力すると共に、プリンタに出力するIDT(Intelligent Decoder for Tele-text)部12と、それら映像/存声信号を8F変調するRF変調器13とが設けられている。なお、上記RAN部7には、CPU9のワークRANも含まれている。

勝馬投票制御部3には、RXP4からのリモコン信号を受信するための受光部およびL/F部14と、勝馬投票に必要な情報や勝馬投票データ等を記憶するRAM部15と、電話回線を介して勝馬投票券免光センター(コンピュータ)側と接続するためのNCU(Netvork Control Unit)16と、このNCU16を介してデータ等の送受信を行なうモデム部17と、RXP4の操作に応じ、勝馬投票制御や設示制御処理を行なうためのCPU(マイクロコンピュータ)18と、このCPU18の制御プログラム等が記憶されるROM部19と、受光部およびI/F部14、RAM部15、CPU18およびROM部19等を接続するバス20と、このバス20と文字放送受信部2のバス11とを接続するI/F部21と、チューナ部5からの受信状況の情報信号を

および1/F部14の受光部14 a と、上記メモリカード25の挿入口26 a とが設けられている。また、第4 個に示されるように、上記在宅投票装置の背面には、アンテナ1 が接続されるアンテナ用のコネクタ1 a と、上記IDT部12のプリンタ出力用のコネクタ12 a と、その映像出力用のコネクタ12 c と、その映像出力用のコネクタ12 c と、上記RF変調器13のRF出力用のコネクタ16 a とが設けられている。これにより、IDT部12からの映像信号は映像出力用のコネクタ12 t 大のでにはその映像出力用の21ピンコネクタ12 t を介してテレビジョン側に送られ、そのテレビジョン側に送られ、そのテレビジョンの適面にはその映像が表示される。

次に、上記構成の在宅投票装置の動作を第5回 乃至第12回のフローチャートおよび第13回乃至第 33回のテレビ関節の表示状復回に基づいて説明する。

まず、当該宅投票装置の扱者等により既に競馬 の主催者との間で契約が行なわれており、その任 入力するためのI/F部22と、NCU16、モデム部17とパス20との間でインターフェイスをとるためのI/F部23、24と、勝馬投類に関する種々ソフトが記憶されているメモリカード25と、そのソフトを説み取るメモリカード説取部26とが設けられている。なお、上記RAN部15はCPU18のワークRANを備え、世池によりバックアップされている。

RKP 4 は、テレビジョン等のリモコンと同様に、 赤外線のリモコン信号を発光するものであり、こ のRKP 4 には、第 2 図に示されるように、文字放 送の受信、勝馬投票券を購入するための操作キー が設けられている。操作キーには、例えば「電源」 キー、テレビ放送や文字放送の受信キー等のテレビ/文字操作キー群 27 と、競馬情報や勝馬投票に 必要な表示、投票、送信および照会等を選択する ためのファンクションキー群 28 と、勝馬投票券を 購入するために勝馬番号、金額および暗缸番号(1 D)等を入力する購入キー群 29 とが設けられている。

なお、第3 関に示されるように、上記在宅投票 製質の正面には、 私源スイッチ30と、上記受光部

宅投票装置と主催者側の勝馬投票券発売センターとが電話回線を介して接続されるようになっているものとする。また、、その在宅投票装置は、 単語回線およびテレビジョンと接続されているものとする。

第5回のフローチャート図において、 世級スイッチ30がONにされ、テレビ/文字操作キー群27の「世級」キーが操作され、その操作のリモコン信号が勝馬投票制御部3の受光部およびI/F部14を介して入力されると、CPU18にて勝馬投票券購入のための投票、 放り金の残高、 的中レース等を知るための収録が立ちなり、 のの収益が行なり、 第13回に示されるように、 テレビジョブS T1)。 すなわち、 例えばROM部19に記憶されている、 はメモリカード 説版部26にて 読み取られたプログラムにより、 CPU18にてタイトルな示の命令およびデータがI/F部21を介して 文字 放送 党信部2に送られる。すると、 文字 放送 学信部

のCPU 9 にて、そのタイトル表示の命令がIDT部12 に送られると共に、その表示データが共有メモリ 部 8 に記憶され、画面には上記タイトル表示が行 なわれる。

ここで、RXP4のファンクションキー群28の「投 票」、「照会」、「表示」等のうち「投票」キーが操作 され、RKP4からのリモコン信号が勝爲投票制御 部3の受光部およびI/F部14を介してCPU18に入力 されると(ステップST 2)、ROM部19の投票サブル ーチンがスタートされる。そして、現在投票操作 中であるか否かの判断が行なわれ(ステップST3, ST4)、投票操作中でなければ、投票の初期設定 済みかの判断が行なわれる(ステップST5)。すな わち、勝馬投票制御部3にて勝馬投票が可能な状 態となった場合には、 第 6 図に示す投票 A サブル ーチンに進み、その状態になっていない場合には、 場名選択表示処理、場名(開催競馬場名)や発売区 分(当日、前日発売)の設示処理が行なわれ、例え ばROM部19に記憶されている場名設示データがI/F 部21を介して文字放送受信部2に転送されると共

する所定競馬場、所定レースの勝馬投票や所定レースの競馬情報の投示等(投票入力画面の表示)を行なうことができるようになる。

次に、第6図のフローチャート図において、上 記初期設定が済むと、勝馬投票制御部3にて、通 常の勝馬投票ができる投票入力画面の表示処理が 行なわれる(ステップST9)。すなわち、第16回に 示されるように、例えば勝馬投票券が購入できる 締切時間の趾も近いレースについて、勝馬投票の 式別(連勝、単勝、複勝)が問われる。このとき、 そのレース番号は、例えば購入キー群29の矢印キ 一擬作にてカーソルCを移動し、ファンクション キー 屛 28の「+」、「-」キーにて変更してもよい。 ここで、購入キー群29の「返酵」、「単勝」および 「複勝」キーの何れかを操作すると、第17國に示さ れるように、そのキー操作に応じた表示制御処理 が行なわれ、画面には「レン」、「タン」および「フ ク」等が表示されると共に、その表示に遅れてカ ーソルCが移動される。続いて、数字「1」から 「0」のキー操作にて勝馬番号を入力すると、その に、その場名選択表示命令が出力される。その表 示データが共有メモリ部8に記憶されると共に、 その命令がIDT部12に人力され、第14回に示され るように、画面には競馬場名、発光区分等の投票 画面が表示される(ステップST7)。ここで、例え ば東京競馬場の当日発売を選択する場合には、画 面下部に表示されているメッセージにしたがって、 RKP4の購入キー群29の数字「6」キー、さらに 「#」キーを操作する(ステップST8)。すると、CP U18にてその選択に応じた表示制御処理が行なわ れ、第15回に示されるように、「6.東京」の設 示部分の色が変えられ、他の部分と見分けられる ようになる。絞いて、上記同様に数字「1」キー、 さらに「#」キーを操作すると(ステップST B)、 東 京競馬場の当日発売の勝馬投票券を購入するため の初期設定が行なわれ、投票Aサブルーチンに進 むことになる。

このように、顧谐の設示にしたがって、RKP4の操作を行なうことにより、勝馬投票初御部3のCPU18にて勝馬投票の初期設定が完了され、後述

番号が表示されると共に、それに連れてカーソル Cが移動される。さらに、その数字キーと「万」、 「千」、「百」、「円」キーとの組合せ操作にて勝馬投 **原券の金額を入力すると、その操作に応じた金額** 演算処理および設示処理が行なわれ、同図に示さ れるように、 晒面の所定個所にはその金額(合計、 疫苗)が表示される。なお、式別(遮腸、単勝、複 勝)と勝馬番号が入力されたときには、現に受信 している文字放送の放新競馬番組によるオッズ情 報に扱づいてその概算払戻率および人気順番の殺 示処理が行なわれ、画面にはその勝馬投票番号、 金額と共に、オッズと人気順位が設示される。そ こで、例えば巡腸「1-3」の勝馬投票券を1万円 購入する場合には、購入キー群29の「巡撈」キーを 操作した後、「1」と「3」キーを操作し、さらに 「1」と「万」と「円」キーを操作することになる。こ のようにして、勝馬投票が行なわれた後、その勝 馬投票のレースに出走する競走馬に取消がないか の判断が行なわれる(ステップST11)。 取消がない 場合には、担保として頂けてある金額の残高が

-----「0」以下であるか否かの判断が行なわれる(ステ される表示調面にしたがって、ファンクションキ ー群28の「送借」キーが操作されると(ステップST1

ップST12)。その勝馬投票券を購入できる金額が 残っていると、勝馬投票の租券に間違いがないか のエラー検出が行なわれる(ステップST13)。間違 った腊馬投媒が行なわれていなければ、さらに他 の勝馬投票を入力するか否かの判断が行なわれる (ステップST13)。すなわち、第18図に示されるよ うに、両面の下部に表示されているメッセージに したがって、ファンクションキー群28の前定キー (「#」キー)が操作されたか否かの判断が行なわれ る(ステップ5714)。その所定キー操作が行なわれ ていない場合、ステップST10に戻り、同レースに おける他の勝馬投票が可能とされる。また、その レースに出走する競進馬の中に、出走取消馬が発 生している場合、あるいは担保として預けてある 金額の投稿が「O」以下(例えばマイナス)となる場 合には、ステップST10に戻って、再び勝馬投媒の ための入力両面設示処理が行なわれ、再度勝馬投

続いて、「#」キーが操作された後、第19回に示

類が行なえるようになる。

の下部表示されているメッセージにしたがって 「#」キーを操作する。すなわち、「取消」キー操作 の後、「#」キーを操作すると、勝馬投票データの 取消処理およびその表示取消処理が行なわれ(ス テップST20,ST21)、RAM部15からはその勝馬投媒 データが消去され、第19図に示されるように、画 而からは勝馬投媒に関する表示が消去される。な お、その取消は非常に重要であることから、その 取消処理に際して再確認を行なう確認処理を追加 してもよい。一方、その取り消そうとした勝馬投 <u> 魚が既に主催者側に送信されている場合には、エ</u> ラー表示処理が行なわれ(ステップST22)、画面に は、例えば「送信済み」といったメッセージが表示 される。続いて、その取消処理あるいはエラー殺 示処理が実行された後、ステップST 2 に戻り、機 能通択(ファンクション)キー操作の待機状態とさ れる.

次に、郊9図のフローチャートにおいて、「娑 更」キーが操作されると、 現在勝馬投票の途中で あるか省かの判断が行なわれる(ステップST23)。

5)、第7図に示す送信サブルーチンがスタートさ れ、また「取消」キーが操作された場合(ステップS T16)、第8回に示される取消サブルーチンがスタ ートされ、さらに「変更」キーが巣作された場合 (ステップST17)、 第9図に示される変更サブルー チンがスタートされる。また、それら「送信」、 「取消」、「変更」キーの何れも操作されないときに は、ステップST2に戻って上述した第5回に示す ルーチンが災行される。

次に、第8回のフローチャートにおいて、「取 消」キーが操作されると、上記RAM部15に記憶され ている勝馬投票データが既に勝馬投票券発売セン ターのコンピュータに送信されているか否かの判 斯が行なわれる(ステップST18)。送信前である場 合には、第18図に示されるように、その勝馬投票 データに応じた表示制御処理が行なわれ(ステッ プST19)、画面には投票内容の一覧が表示される。 ここで、勝馬投票を取り消すときには、その画面

勝馬投票中である場合には、第20回に示されてい るように、投票の変更画面の設示制御処理、その レース番号を招定する(色を変える)表示制御処理 が行なわれる(ステップST24)。ここで、ファンク ションキー作28の「+」キーと「-」キーを操作する と(ステップST25)、そのレース番号がアップ/ダ ウンし、勝馬投票のレース番号の変更表示処理が 行なわれ、脳面にはその選択されたレース番号の 勝馬投票の入力画面が表示される。また、そのレ ース番号変更のための操作が行なわれ、あるいは 勝馬投票の入力途中である場合にはステップST14 に戻り、その勝馬投票の入力が晒而下部にメッセ ージにしたがって完了するまで、ステップST10か らST13が繰り返し行なわれる。すなわち、複数の レースについて勝馬投票を行なうことができ、あ るいは現に入力しているレースの勝馬投票に続け て、勝馬投票を行なうことができる。さらに、そ の適所に表示されるレース番号と勝馬投票の変更、 確認を行なうことができる。このようにして、所 望の勝馬投票が行なわれると、その勝馬投票デー

タは一旦RAM部15に記憶される。その入力が完了 された後(ステップST14)、上記「送信」キーが操作 されると(ステップST15)、送信サブルーチンがス タートされる。

次に、第7回の送信サブルーチンにおいては、 その「送信」キーが操作されると、加入者册号(当 該在宅投票装置の番号)が入力されている否かが 判断され(ステップST26)、人力されていない場合、 第21回に示されるように、加入者番号の入力画面 表示処理が行なわれる(ステップST27)。そこで、 その表示画面の下部のメッセージにしたがって当 該加入者番号、例えば「123456」を順に数字 キーにて入力すると(ステップST28)、同同に示さ れるように、表示画面には「123456」が扱 示されると共に、その番号の登録が行なわれる(R AM部15に記憶される)。その加入者番号が当該在 宅投票装配の番号と比較され、間違って入力され た場合、エラーの判断が行なわれ(ステップST29)、 ステップST29に戻り再度加入者番号の入力符ちと される。すなわち、他人により当該在宅投票装置

の勝馬投票券購入に必要なデータがI/F部24、モ デム部17、NCU16を介して送信される。そのデー 夕送信は、例えばパケット形式で一括に行なわれ、 勝馬投票券発売センター側ではそのパケットデー タを入力すると、勝馬投票を受け付けた旨を当該 在宅投票数置に送信することになる。その情報が NCU16、モデム部17、I/F部24を介して受信される と、その通信が正常であったか否かの判断が行な われる(ステップST33)。通借エラーが発生してい なければ、上記通信に際して勝馬投製券発売セン ターから送信された情報に基づいて、勝馬投奨が 間違って受け付けられていないか否かの判断が行 なわれる(ステップST34)。間違っていないときに は、画面には、発券センターよりの投票受付番号、 勝馬投票券の購入枚数、金額、送信完了等が表示 される(ステップST34)。一方、スチップST33にて 通信エラーが発生したと判断された場合、例えば. 勝馬投票券の新切時間となり、その勝馬投票の通 信が受け付けられないこともある。そこで、画面 には通信エラーである旨のメッセージが扱示され

を使用できないようにするためである。なお、当 蹊在宅投票装置の電源が投入された後、一度その 加入者番号が入力されると、それ以後は上記送信 表示画面にその番号が自動的に表示される。この ようにして、間違いのない加入者番号が入力され ると、第22回に示されるように、契約者の暗証番 号(ID)の入力函面表示処理が行なわれる(ステ ップST29)。その表示画面の下部のメッセージに したがって当該暗証番号、例えば「●●●」を順 に数字キーにて入力すると(ステップST31)、第23 図に示されるように、画面には送信のための表示 が行なわれる。そこで、面面下部のメッセージに したがってファンクションキー併28の「送信」キー を操作すると、勝馬投展券発売センター側と通信 可能とするための自動ダイヤリング制御処理が行 なわれる(ステップST32)。すると、当該在宅投票 装置からはI/F郎23、NCU16を介してダイヤル信号 が送借され、そのダイヤル信号が着信されると、 当該在宅投票装置とその勝馬投票券発売センター との通信回線が閉じられ、当該在宅投票装置から

次に、第10回に示す風会サブルーチンにおいて、そのファンクションキー群28の「風会」キーが操作されると、第24回に示されるように、風会メニューの表示処理が行なわれる(ステップST39)。その数が両面の下部のメッセージにしたがって何れかのメニューが数字キーと「#」キーとの操作にて進

択されると、加入者番号が入力されているか否か の判断が行なわれる(ステップST40)。その加入者 番号が入力されていない場合には、第7図に示す 送信サブルーチンの場合と同様、第21図に示され るように、加入者番号の入力画面設示処理が行な われる(ステップST41)。 その表示画面の下部のメ ッセージにしたがって当該加入者番号、例えば 「123456」が数字キーにて入力されると(ス テップST42)、その設示画面には、「123456」 が入力され(同図に示す)、その番号の登録が行な われる。その加入者沿分が間違って人力された場 合、エラーの判断が行なわれ(ステップST43)、ス テップST42に戻り再度加入者番号の入力待ちにさ れる。なお、当該在宅投票装置の電源が投入され、 一度その加入者番号が入力されると、それ以後は 上記送信表示画面にその番号が自動的に表示され る。このようにして、間違いのない加入者番号が 入力されると、第22図に示されるように、契約者 の暗証番号(ID)の入力画面設示処理が行なわれる (ステップST44)。その表示函面の下部のメッセー

ジにしたがって当該暗証番号、例えば「●●●」 を数字キーにて入力すると(ステップST45)、同図 に示されるように、画面にはそれら加入者番号、 **軒証番号が表示される。そこで、頭面下部のメッ** セージにしたがってファンクションキー作28の 「照会」キーを操作すると、勝馬投票券発売センタ ーを呼び出し、通信可能とするための自動ダイヤ リングが行なわれる(ステップST46)。すると、当 該在宅投票装置からはダイヤル信号が出力され、 そのダイヤル信号は電話回線を介してその勝馬投 異非発光センターに送られる。勝馬投票券発売セ ンターにてそのダイヤル信号が名信されると、当 該在宅投票装置とその勝馬投票券発売センターの 間の通信回線は閉じられ、当該在宅投票装置から は、歿路風会のための風会データが送借される。 勝馬投票券発売センターではその残高風会データ に抜づいて加入者の所定登録口座より投高情報デ ータを引み出し、送信する。その残高情報データ が受得され、RAM部15に記憶されて通信完了とな ると(ステップST47)、通信が正常であったか否か

の判断が行なわれる(ステップST48)。通信エラー が発生していなければ、第25回に示されるように、 上記燈路情報データに基づいて規筋設示処理が行 なわれる(ステップST34)。また、「3. 的中」が遊 択されている場合には、当該在宅投票装置からは 的中瓜会データが送信され、そのデータに基づい て勝馬投票券発売センターからは加入者の購入し た勝馬投票券の中で的中しているレースの番号、 爲壽号(迦醫、単勝、複勝)、購入金額、払戻金等 の情報データが送信される。これにより、第26図 に示されるように、上記通信に際して勝馬投票券 発売センターからの送信情報データに基づいて的 中設示処理が行なわれる(ステップST34)。一方、 ステップST48にて通信エラーが発生したと判断さ れた場合、例えば何等かの理由でその通信が行な われないこともある。その場合、画面には通信エ ラーである旨のメッセージが表示され(ステップS T50)、その後再度照会データを送信する必要があ るか否かの判断が行なわれる(ステップST51)。再 皮肌会データを送信する必要がない場合には、そ

のまま通信を行なわずに送信終了とされる。また、 再度概会データを送信する必要があると判断され た場合には、上記と同じ通信が開始される。この ようにして、概会データの送信が完了されると。 ステップST 2 に戻ってファンクションキー群 28 の 操作特ち状態とされる。

次に、第11図の設示サブルーチンにおいて、そのファンクションキー群28の「設示」キーが操作されると、1/F部22を介して入力した受信状況の情報はらいるか否かの判断が行なわれる(ステップST52)。文字放送受信部2にて正常な受信が行なわれると、文字放送の競馬番組の情報により、今日が競馬関係日であるか否かの判断が行なわれる(ステップST53)。続いて、その競馬場の関係日である場合には、画面に競馬情報の表示が行なわれているか否かの判断が行なわれる(ステップST53)。 続いているの表示が行なわれていないときには、第27図に示されるように、場名選択画面の表示処理が実行される(ステップST55)。すなわち、既に額々設場情報

報等の表示処理が行なわれているときには、その 表示のための初期設定が既に行なわれているから である。そこで、面面下部のメッセージにしたが って、所定数字キーの操作、続いて「#」キーが投 作されると(ステップST56)、第28図に示されるよ うに、 表示メニュー 画面の表示処理が行なわれる (ステップST57)。さらに、その函面下部のメッセ ージにしたがって、例えば数字キー「1」と「#」キ ーが操作されると(ステップST58)、オッズ情報殺 示モードとされ、例えば連勝キーが損作されると、 第29図に示されるように、オッズ(例えば10レー スの連勝オッズ)表示処理が行なわれる(ステップ ST59)。このとき、歯面に表示されている進歴オ ッズ情報は、文字放送の競馬番組よりの最新のデ ータに基づいたものである。これは、例えば勝馬 投票券を購入するに際し、ファンにとってオッズ **憐収が極めて重要な目安となっているからである。** ここで、ファンクションキー群28の「+」キーある いは「一」キーが操作されると、レース番号がアッ プあるいはダウンされる。その操作に応じたレー

スのオッズ情報が画面に設示される。また、「迎 砂」キー操作の変わりに「単勝」キーあるいは「複勝」 キーが操作されると、その操作に応じたオッズ情 報送示処理が行なわれ、第30回に示されるように、 画面には上記速勝オッズ情報表示と同様のオッズ 情報が表示される(ステップST59)。

れ、脛面にレース結果(競走成績、払戻金)等が表示される(ステップST59)。

このような表示制御処理が行なわれた後、ステ ップST2に戻って機能選択キーの入力待ちとされ る。すなわち、上記オッズ情報等が画面に表示さ れているときでも、ファンクションキー群28の 「投票」、「照会」、「表示」キーの何れかが操作され ると、その操作に応じたモードとされる。一方、 ステップST52において、文字放送受信部2にて文 字放送が正常に受信されていないときには、エラ ーメッセージの表示処理が行なわれ、画面にはそ の旨を報知するメッセージが表示される。さらに、 ステップST53において、競馬開催日でないと判断 された場合には、エラーメッセージの表示処理が 行なわれ、画面にはその旨を報知するメッセージ が表示される。なお、そのメッセージと共に、次 回開催日を表示してもよい。このように、エラー メッセージ表示処理が行なわれた後、ステップST 2に戻って機能選択キーの入力符ちとされる。

次に、第6回に示す投票 A サブルーチンにおい

て、ファンクションキー群28の「オッズ投票」キー が操作されると、第32図に示されるように、競馬 番組の政新情報に基づいてオッズ情報および投票 晒面の表示処理が行なわれ、 画面には当該レース (例えば10レースの退勝オッズ)が表示される。こ こで、函面下部のメッセージにしたがって数字キ ーと「#」キーを操作すると、当該レースの勝ち馬 投災が行なえる。すなわち、例えば「1」、「3」、 「#」キーを操作すると、同図に示されるように、 「1-3」の部分の色が変えられ、さらに他の勝馬 投票、例えば「2-3」等を入力することができる。 なお、ファンクションキー群28の「+」キーあるい は「一」キーが操作されると、レース番号がアップ あるいはダウンし、その操作に応じたレースのオ ッズ竹叙が画面に設示される。また、「単勝」キー あるいは「複勝」キーが操作されると、その操作に 応じたオッズ情報表示処理が行なわれ、第33図に 示されるように、画面には上記逃路オッズ情報表 示と同様に単勝、あるいは複勝オッズ情報が表示 される。このように、勝馬投票が入力された後、

投票入力函面に戻すことにより、その勝馬投票の 金献等を入力することができる。

さらにまた、上記第11図に示す表示サブルーチンのステップST58において、「1 . オッズ」が選択されている場合、ファンクションキー作28の「オッズ投票」キーを操作すると、第32図に示されるように、上記同様のオッズ投票面面の表示処理が行なわれ、画面には当該レース(例えば10レースの連絡オッズ)が表示され、勝馬投票が可能とされる。しかも、上述したように任意のレースの連勝、単勝および視勝のいずれの勝馬投票も入力することができる。

このように、オッズ投票は、オッズ画面を見ながら勝馬番号を選択し、投票人力画面に戻って姆入金額を入力して投票することができるものである。したがって、「オッズ投票画面へ、またにない票面面からオッズ投票画面へのようになっている。また、オッズ投票画面からオッズ投票画面からオッズ投票画面からオッズ投票画面からオッズ投票画面を見る場合には「表示」キーを操作し、オッズ投票画

て済み、勝馬投棄券発売センター側と接続される 在宅投票装置がより多くなり、より多くのファンが勝馬投票券を購入できるようになる。また、この発明によれば、文字放送の競馬番組による最新情報を記憶するようになっているため、いつでも必要とする最新の競馬情報を得ることができ、ファンにとってはその最新情報を参考として勝馬投票を行なうことができるという効果がある。

4. 図面の簡単な説明

第1回はこの発明の一実施例を示す在宅投票装置の概略的ブロック図、第2回は上記在宅投票装置に用いられるRXP(リモート キー パッド)の正面図、第3図および第4回は上記在宅投票装置の正面図および背面図、第5図乃至第12回は上記在宅投票装置の動作を説明するためのフローチャート図、第13図乃至第33図は上記在宅投票装置の表示处理によるテレビジョンの画面の表示状版図である


図中、1はアンテナ、2は文字放送受信部、3 は勝馬投票制御部、4はRKP(リモート キー パッ 逝から投兵前面に戻る場合には「投票」キーを操作 すればよい。以上説明した実施例は、概ね第12図 のフローチャートに示されるように動作される。

このように、任意のレースの勝馬投票に必要なデータが一括で送信されるので、電話回線の使用時間が短くなり、より多くの加入者にて勝馬投票券の購入ができるようになる。

[発明の効果]

ド;リモコン)、5はチューナ部、6はDRT部、7はRAM部(文字放送受信部2の)、8は共有メモリ部、9はCPU(文字放送受信部2の)、10はROM部(文字放送受信部2の)、11はバス(文字放送受信部2の)、12はIDT部、13はRF変額符、14は受光部および1/F部、15はRAM部(勝馬投棄制御部3の)、16はNCU(Network Control Unit)、17はモデム部、18はCPU(勝馬投票制御部3の)、19はROM部(勝馬投票制御部3の)、20はバス(勝馬投票制御部3の)、21、22、23、24は1/F部、25はメモリカード、26はメモリカード就取部である。

将 許 出 願 人 株式会社宮士通ゼネラル 代理人 弁型士 大 原 拓 也

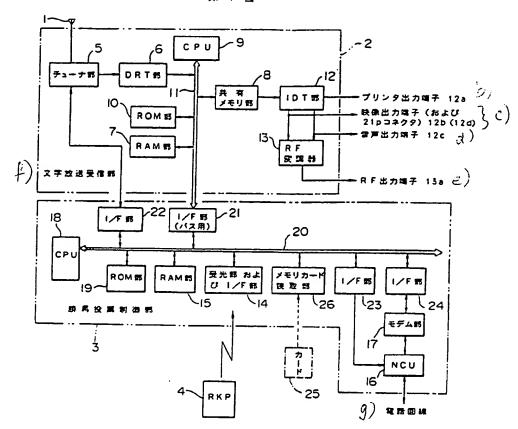

5

2

0

3

3

29

Ħ


Ŧ


A


第 2 四





.26a

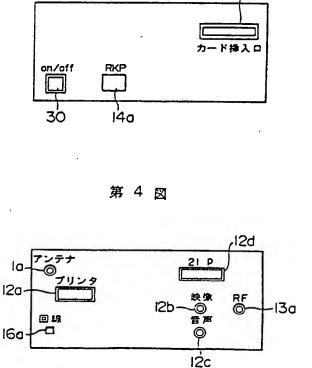


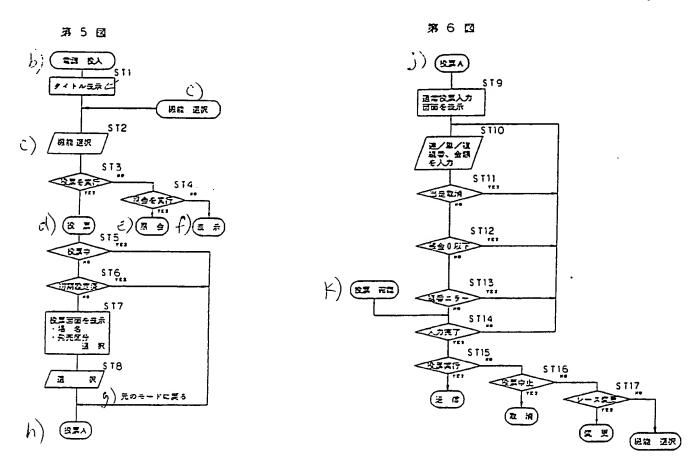


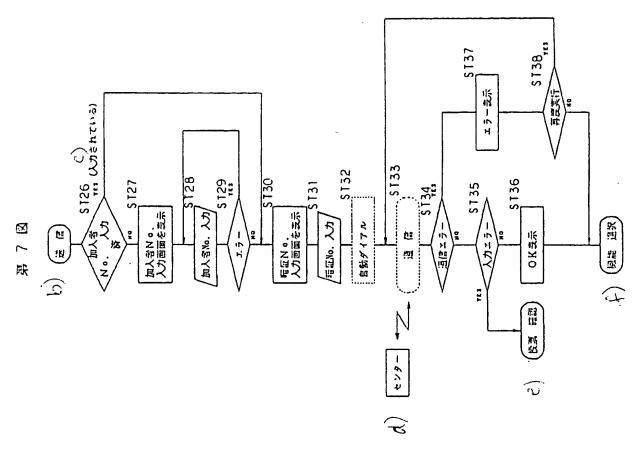


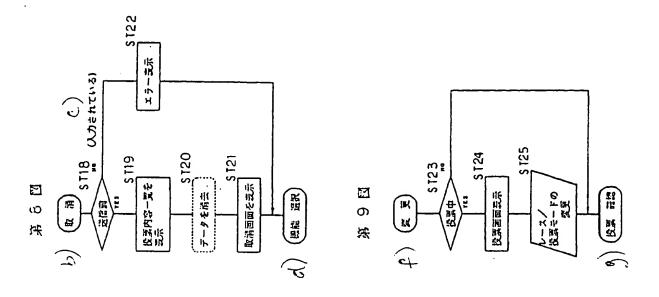

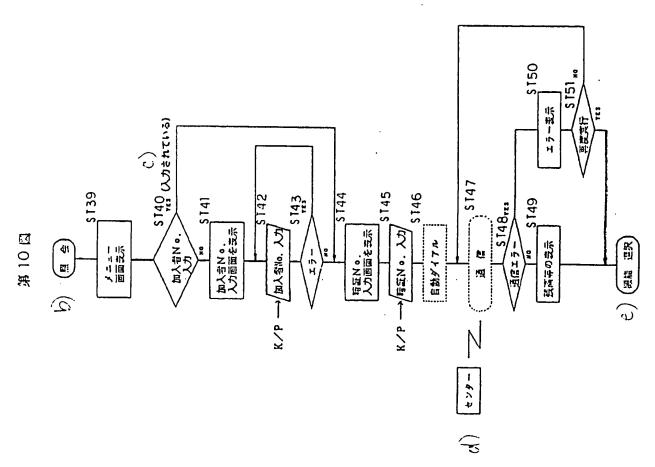

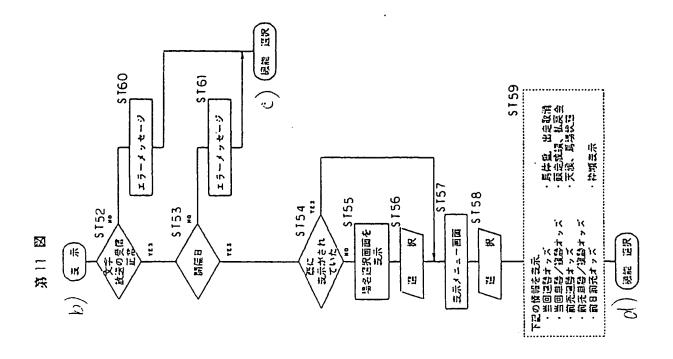

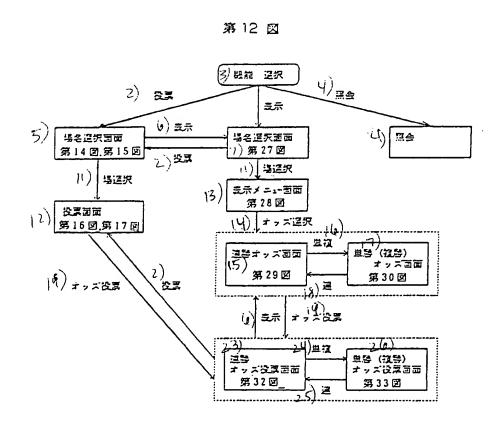

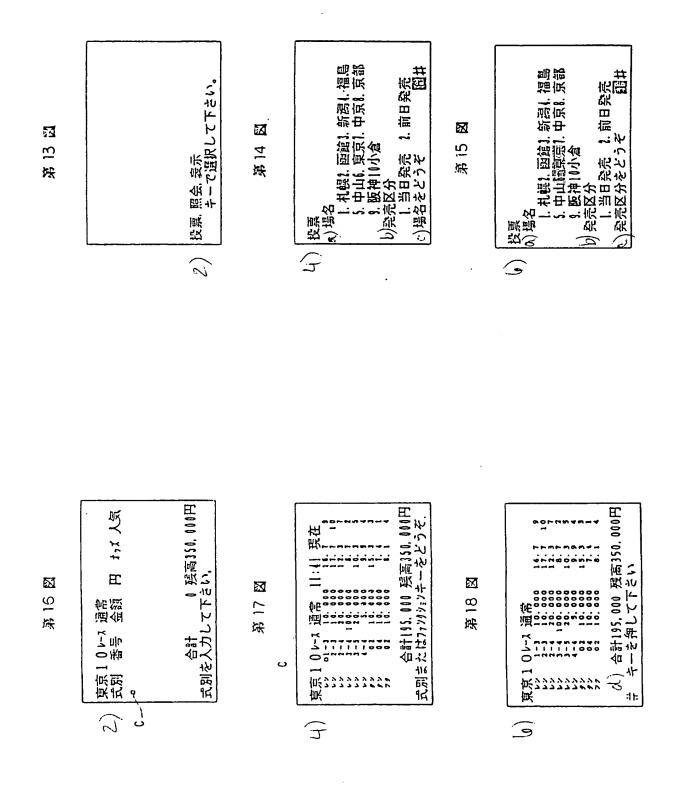

第22四

図 61 寒

2.) 萊京101-1 通铅

高人 語 に ストン・ストン・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・	123456	* * * *	şţ.
	字字	· o N 協切	鬼間No. かどうが.

第23网

記	
受付否号	與入校款 1,950校
合計195,000円	是高155.000円
	•
オネーキババババ	が詳した下がこ

第24図

17 版刊 17	井岡 いき上ン
if	メニューを選択して下さい 図
9	

第20図

ファンシュンキーを押して下さい

907124414	000FB
PPMPM0W4-	高350,
9778	<u>1</u>
	残
00000000	- iv
∮ E00000000	3.0
)用000000000000000000000000000000000000	計195,000 号をどうぞ
mm + m + m + m + m	2.46
	企协
9	42 IV
校333333555	1
陕	ک
<u>a</u>	

第21 図

123456) 7 .
	をどうぞ
说信 加入着No.	加入考No.

X 第28日

學 ς. ニューを追択して下さい オッス | 読寺成绩、社戻会 | 馬体童、出定取消 | 万候、馬場状誌 15 1 ポポメ 5 -i.c. 4.€.

s de

日0000

155,

 \mathbf{X}

第25

關金

あなたの経過は

ファンクションキーを抑して下さい

 \mathbf{M} 29 採

調 3.9.5 - C PHENERA 'ভল BVILLE AND STATE

100, 000円

1

京京

8 V-7 3-命

2

汌

K

忠中

3)

M

58

無

田0

0 0

0

8 7

払戻金


怒


27


紙

- 福島 描 (#57-- X8) ... 高い にい 場名の番号をどうぞ |. 頭頭 | | |. 日本ダ-|. 天喧強 皇の宗皇 9

現在 第30区 0 1-1 电膨 京京1 و.







33 图

採

第1頁	₹の#	売き						
⑦発	明	者	橋	本	順 -		神奈川県川崎市髙津区末長1116番地 ラル内	株式会社富士通ゼネ
⑦発	明	者	山	根	賢 -	-	神奈川県川崎市高津区末長1116番地 ラル内	株式会社富士通ゼネ
⑦発	明	者	稲	見	雅	爹	神奈川県川崎市高津区末長1116番地 ラル内	株式会社富士通ゼネ

32图

紙

PATENT ABSTRACTS OF JAPAN

(11) Publication number: 02110660 A

(43) Date of publication of application: 23 . 04 . 90

(51) Int. CI

G06F 15/28 H04N 7/08

(21) Application number: 63263421

(22) Date of filing: 19 . 10 . 88

(71) Applicant **FUJITSU GENERAL LTD**

(72) Inventor.

SUZUKI YASUSHI KAKIMOTO KOJI ILUY IMAKIM HASHIMOTO JUNICHI YAMANE KENICHI **INAMI MASAHIKO**

(54) HOME BETTING DEVICE


(57) Abstract:

PURPOSE: To shorten the time for using a telephone line when a betting ticket is purchased by displaying horse race information by teletext and information by a display processing means on the screen of a television and transmitting betting data to a selling side by a winning horse betting setting means.

CONSTITUTION: Information about a race horse in a prescribed race stored in a RAM part 7 such as the weight, the odds, and the race result of the race horse is displayed on the screen, on which a teletext horse race program, etc., received by a teletext receiving part 2 are to be displayed, by a CPU 9. Further, when winning horse betting is executed by operating a remote key pad (RKP) remote controller 4, winning horse betting data are stored in a RAM 15 of a winning horse betting control part 3, a winning horse number to be purchased. a purchased amount, and an approximate paying back rate and a popularity rank at a current point by the teletext are displayed on the screen, and winning horse betting ticket purchase data are collectively transmitted through an UF part 24, a modem part 17, a network control unit (NCU) 16 to the winning horse betting ticket selling side by the telephone line in a

packet system.

COPYRIGHT: (C)1990.JPO&Japio



LAWYERS' AND MERCHANTS' TRANSLÀTION BUREAU, INC.

Legal, Financial, Scientific, Technical and Patent Translations
11 BROADWAY
NEW YORK, NY 10004



Certificate of Accuracy

TRANSLATION

Fron

Japanese into English

STATE OF NEW YORK COUNTY OF NEW YORK **s.s.**:

On this day personally appeared before me who, after being duly sworn, deposes and states:

Elisabeth A. Lucas

That he is a translator of the Japanese and English languages by profession and as such connected with the LAWYERS' & MERCHANTS' TRANSLATION BUREAU;

That he is thoroughly conversant with these languages;

That he has carefully made the attached translation from the original document written in the Japanese language; and

That the attached translation is a true and correct English version of such original, to the best of his knowledge and belief.

SUBSCRIBED AND SWORN TO BEFORE ME THIS

JAN 2 9 2002

Susan Tapley

Notary Public, State of New York No. 01TA4999804

Qualified in Queens County Certificate filed in New York County and Kings County

Commission Expires July 27, 2002

1 x Mc de

TRANSLATION FROM JAPANESE

- (19) JAPANESE PATENT OFFICE
- (12) Unexamined Patent Application Gazette (A)
- (11) Unexamined Patent Application 2-110660
- (43) Disclosure Date: April 23, 1990
- (51) Int. Cl. ⁵ Identification Code JPO File No.

G 06 F 15/28

A 7165-5B

H 04 N 7/08

A 8838-5C

Request for Examination: Not filed

No. of Claims 6

(Total 18 pages)

- (54) Title of the Invention: Apparatus for at-home betting
 - (21) Patent Application No. 63-263421
 - (22) Filing Date: October 19, 1988
- (72) Inventor: Yasushi Suzuki, c/o Fujitsu-General, Ltd., Suenaga 1116, Takatsu-Ku, Kawasaki-shi, Kanagawa-ken, Japan
- (72) Inventor: Koji Kakimoto, c/o Fujitsu-General, Ltd., Suenaga 1116, Takatsu-Ku, Kawasaki-shi, Kanagawa-ken, Japan

- (72) Inventor: Yuji Minami, c/o Fujitsu-General, Ltd., Suenaga 1116, Takatsu-Ku, Kawasaki-shi, Kanagawa-ken, Japan
- (71) Applicant: Fujitsu-General, Ltd., Suenaga 1116, Takatsu-Ku, Kawasaki-shi, Kanagawa-ken, Japan
- (74) Agent: Attorney, Takuya Ohara (continued on last page)

SPECIFICATION

1. Title of the Invention: Apparatus for at-home betting

2. Claims

1. An at-home betting apparatus comprising

a tele-text broadcast receiving means for receiving the tele-text broadcast of a specified channel by means of a television signal received by an antenna, converting the racing programs, etc. of that tele-text broadcast into a video signal and outputting that signal to a television or the like, a horserace betting means comprising memory means for storing data on information necessary for horserace betting, display processing means for displaying necessary information on said television screen based on information stored in said memory means, horserace bet establishing means for establishing on that screen, the horse number, the monetary amount of purchase, and [purchaser] ID number for the specified bet,

horserace bet transmitting means for transmitting the bet established by that horserace bet establishing means to a horserace betting slip sales side, via a telephone line, whereby, when placing said bet, horserace information from the tele-text broadcast is displayed on said television screen together with the display of horserace information obtained from said display processing means, the number of the horserace bet placed through said horserace bet establishing means, etc., and whereby data on that horserace bet is transmitted to said horserace betting slip sales side, enabling the bet to be placed.

- 2. The at-home betting apparatus according to claim 1, wherein said display processing means displays on said screen race track names and same day sales and advance sales of bets so that the specified race track and sales date are established by said racehorse bet establishing means.
- 3. The at-home betting apparatus according to claim 1, wherein said display processing means displays on said screen the bet number established by said horserace bet establishing means, the monetary amount of the purchase, a forecasted payback rate for that bet number based on the latest horserace information of said tele-text broadcast, and the popularity ranking.

- 4. The at-home betting apparatus according to claim 1, wherein said display processing means displays the bet number for a combination win, win or place established by said horserace bet establishing means, the monetary amount of the purchase, the total amount, etc.
- 5. The at-home betting apparatus according to claim 1, wherein said horserace bet transmitting means transmits to said horserace betting slip sales side as a batch the race number, horse number, number of betting slips (monetary amount) purchased, for the bet established by said horserace bet establishing means, and the member number of said athome betting apparatus, the ID number, and other data necessary for placing the bet.
- 6. The at-home betting apparatus according to claim 1, wherein said horserace bet establishing means is a remote control and in said [sic] horserace betting control means a photo-receptor means is provided to receive that remote control signal.
- Detailed description of the invention
 (Field of Industrial Utilization)

The present invention relates to an at-home betting apparatus which enables betting on horse races via a telephone line. More specifically, it relates to an at-home

betting apparatus which receives tele-text horserace programs and displays the horserace program and horserace information from that horserace program, making it possible to refer to that in betting, thus enabling reduction in telephone line usage time when placing such horserace bets.

(Prior Art)

Conventionally, when purchasing horserace bets, one goes to the racetrack having the event or to an off-track betting center, and the general practice is to purchase a bet at the sales window of that off-track betting center, paying cash. However, because purchasing bets in that way takes time and effort, a system has been proposed which, for example as a part of the special services for racing fans, would enable the purchase of those horserace bets by telephone.

Among such telephone betting systems, there are the ARS system and the CRT system, and with these, subscribers enter into contracts with promoters. For example, the individual establishes an ordinary deposit [account] at a bank specified by the promoter, and at the same time creates a "fixed" (or, savings) deposit [account] (for example, with face value of ¥100,000, ¥200,000, or ¥300,000, etc.) The promoter holds this [fixed] deposit as collateral and that amount is set as the limit amount for purchasing horserace

bets. Through this means, the long-distance fan who is a member can purchase the desired horserace bets by telephone.

However there are problems with the above-mentioned telephone betting systems. With the ARS system, the member connects to the computer of the bet selling side by operating the buttons on a push-button telephone. Through further operation of the buttons the details of the bet are inputted. For this reason, it takes time to place a bet and telephone line usage time becomes long and, because the number of telephone lines which can connect to the bet selling side is fixed, there are times when a connection to the betting slip selling computer cannot be made. In particular, as the deadline for a race approaches, members

may swarm [to the phone lines], and in some cases may not be

able to purchase betting slips.

With the CRT system, the member places his horserace betting slip purchase order by telephone directly with an employee at the telephone betting office. In this case, the employee responds to the member based on data about the horses displayed on a cathode ray tube (CRT), accepts the horserace bet order, and a betting slip is sold. However, because the purchase is made verbally, [more] mistakes occur in purchasing horserace betting slips than with the above-

mentioned ARS system. In addition, it has the same kinds of problems mentioned above, with much time being required to make purchases because of difficulty hearing clearly [over the phone] and other such points.

On the other hand, from the standpoint of the fans, when they purchase horserace betting slips, information on the estimated payback rate (odds, etc.) is extremely important reference material, along with racing newspapers. Fans who go directly to the racetrack where the race is held can gain that information from the odds display board, but for at-home betters, their only alternative is to refer to odds information broadcasted for example by radio, TV, etc.

However, there is no assurance that such broadcasts will provide the necessary information on odds, etc. at the desired times, so from the standpoint of the better, there are many inconvenient points.

It is therefore an object of the present invention to provide an at-home betting apparatus which enables shortening of telephone line usage time when purchasing horserace betting slips, thus enabling the purchase of horserace betting slips by more fans, and also making it possible to obtain horserace information, such as odds, as needed.

(Means Used to Solve the Problems)

To achieve the stated object, the at-home betting apparatus of the present invention, in essence, comprises [a] a tele-text broadcast receiving means for receiving the tele-text broadcast of a specified channel by means of a television signal received by an antenna, converting the racing programs, etc. of that tele-text broadcast into a video signal and outputting that signal to a television or the like, and [b] a horserace betting means comprising [i] information storage means for storing data on information necessary for horserace betting, [ii] display processing means for displaying necessary information on said television screen based on information stored in said information storage means, [iii] horserace bet establishing means for establishing on that screen, the horse number, the monetary amount of purchase, and [purchaser] ID number for the specified bet, [iv] horserace bet transmitting means for transmitting the bet established by that horserace bet establishing means to a horserace betting slip sales side, via a telephone line, whereby, when placing said bet, horserace information from the tele-text broadcast is displayed on said television screen together with the display of horserace information obtained from said display processing means, the number of the horserace bet placed through said horserace bet establishing means, etc., and whereby data on that horserace bet is transmitted to said

horserace betting slip sales side, enabling the bet to be placed.

(Operation)

Because the configuration has been made as described above, [i] the information necessary for betting which is stored in said information storage means, [ii] the weight and odds (for combination win, win, or place) for the horses running in a specified race, and [iii] race results, etc. are displayed on the screen on which is displayed the horseracing program of the tele-text broadcast received by said tele-text receiving portion. When betting actions are performed on said horserace bet establishing means (RKP; remote control), referring to this kind of horserace information, the messages necessary for that betting are displayed on said screen. By operating that horserace bet establishing means following those messages, the horse bet number being bought, "1-3" if a combination win [bet] and "16" if a win or place [bet] are displayed, and lined up with those numbers, "10,000," the amount [of the bet] purchased is shown. In addition, the current forecasted payback rate and popularity ranking of the horse bet number being purchased are displayed on the screen. Also, if that horse bet is cancelled or changed (race, horse number, monetary amount of purchase, etc.) via said horserace bet

establishing means, the horse bet number, purchase amount, etc. displayed on said screen are erased or changed.

In this way, by controlling the bet transmitting means, after confirming that there are no mistakes in the horse bet displayed on said screen, communication with the specified betting slip selling side is initiated. That is, the data for purchase of a betting slip is transmitted from said athome betting apparatus, in packet format in one batch, via a telephone line. As a result, just a short usage time of that telephone line is enough and a larger number of athome betting apparatuses can be connected by telephone line to that betting slip selling side.

(Example)

An exemplary embodiment of the present invention is described below, based on the figures.

This at-home betting apparatus, as shown in Figures 1 through 4, comprises [a] a tele-text broadcast receiving portion 2 which receives the tele-text broadcast of a television broadcast received by antenna 1 and displays that tele-text broadcast on a television screen or such, and [b] a horserace bet controlling portion 3 having [i] a [parameter] establishing function which establishes the horse bet number for placing the bet and the monetary amount

of the purchase, [ii] a display processing function for displaying on said screen horserace information (odds, etc.) from the horserace program of the tele-text broadcast and information necessary for placing a bet, [iii] a transmission function which, via a telephone line, transmits to the horserace betting slip sales center the data for purchase of a betting slip, [iv] an inquiry function which inquires whether that betting slip is a winner, etc., [v] a remote control function which operates by a remote control signal, [vi] etc. In this example, the at-home betting apparatus is made so that operation is done by operating an RKP (remote key pad; remote control) 4.

Tele-text broadcast receiving portion 2 comprising [a] a tuner portion 5 which receives the tele-text broadcast of the specified television broadcast channel and "extracts" the video signal, [b] a DRT (Data Regenerator for Tele-text) portion 6 which extracts from that video signal the tele-text data, [c] a RAM portion 7 which stores that tele-text broadcast data, [d] a shared memory portion 8 which stores television screen display data (not shown in the figures) and audio [or, voice] data, [e] a CPU (microcomputer) 9 which controls the reading, writing, transmission, etc. of these data, [f] a ROM portion 10 which stores the control program, etc. of this CPU 9, [g] a bus 11 which connects DRT portion 6, RAM portion 7, shared memory portion 8, CPU 9,

ROM portion 10, etc., [h] an IDT (Intelligent Decoder for Tele-text) portion 12 which, in response to commands from CPU 9 or below described CPU 18, outputs as video/audio signals the display/audio data stored in said shared memory 8, and also sends output to a printer, and [i] an RF modulator 13 which RF modulates these video/audio signals. In addition, a "work RAM" for CPU 9 is included in the said RAM portion 7.

Horserace bet controlling portion 3, comprises [a] a photo-receptor and I/F portion 14 for receiving a remote control signal from RKP 4, [b] a RAM portion 15 which stores information, betting data, etc. necessary for betting, etc., [c] an NCU (Network Control Unit) 16 for connecting to the (computer of the) horserace betting slip sales center, via a telephone line, [d] a modem portion 17 which receives data, etc. via this NCU 16, [e] a CPU (microprocessor) 18 for processing betting control and display control, in response to operation of RKP 4, [f] a ROM portion 19 in which the control program of this CPU18, etc. are stored, [g] a bus 20 which connects a photoreceptor and I/F portion 14, RAM portion 15, CPU 18, ROM portion 19, etc., [h] an I/F portion 21 which connects this bus 20 and bus 11 of tele-text broadcast receiving portion 2, [i] an I/F portion 22 for inputting a "reception status" information signal from tuner portion 5, [j] I/F portions 23 and 24 for providing an

interface between NCU 16, modem portion 17 and bus 20, [k] memory card 25 in which various kinds of software relating to horserace betting are stored, and [l] memory card readout portion 26 which reads that software. In addition, a "work RAM" for CPU 18 is included in the said RAM portion 15 and is backed up by a battery.

RKP 4 is a unit which emits an infrared (IR) light signal, similar to a remote control for a television, etc., and on this RKP 4, as shown in Figure 2, operation keys for receiving the tele-text broadcast and purchasing betting slips are provided. Among the operating keys, key groups are provided: [a] a television / tele-text [broadcast] operation key group 27 which includes, for example, a "Power" key, television broadcast and tele-text broadcast reception keys, etc., [b] a function key group 28 for selecting "Display," "Bet," "Transmit," "Inquiry," etc., as necessary for betting or [obtaining] horserace information, and [c] a purchasing key group 29 which, for purchasing horserace betting slips, inputs the horse number, monetary amount, ID number, etc.

Furthermore, as shown in Figure 3, provided on the front panel of the above-mentioned at-home betting apparatus are a power switch 30, above-mentioned photo-receptor portion and photo-receptor portion 14a of I/F portion 14,

and insertion slot 26a for above-mentioned memory card 25. Also, as shown in Figure 4, provided on the rear panel of the above-mentioned at-home betting apparatus are antenna connector 1a, to which antenna 1 is connected, connector 12a for printer output of above-mentioned IDT portion 12, [the IDT's] video output connector 12b, its audio output connector 12c, its video output 21-pin connector 12d, connector 13a for the RF output of said RF modulator 13, and connector 16a for connecting the telephone line. Through this configuration, the video signal from IDT portion 12 is sent to the television via video output connector 12b or 21-pin connector for video output 12d, and the video is displayed on the screen of that television.

Next is an explanation of the operation of an at-home betting apparatus according to the above-mentioned configuration based on the flow charts of Figures 5 through 12 and the television screen display status diagrams of Figures 13 through 33.

First of all, a contract is entered into between the horserace promoter and the operator of said at-home betting apparatus, and a connection via a telephone line is established between the at-home betting apparatus and the promoter's horserace betting slip sales center. In

addition, the at-home betting apparatus is connected to a television and a telephone line.

In the flow chart of Figure 5, power switch 30 is turned on and the "Power" key of television/tele-text broadcast key group 27 is switched on. Upon inputting a remote control signal to operate it, via the photo-receptor portion of horserace betting control portion 3 or I/F portion 14, CPU 18 performs display processing of the titles which can be selected. These include inquiries to learn the races where bets won, the deposit balance, or bets for purchasing horserace betting slips, or information (odds) from tele-text broadcast horseracing programs. As shown in Figure 13, title display is performed on the television screen (Step ST1). In other words, by means of a program stored in ROM portion 19, for example, or read by memory card readout portion 26, a title display command and data are sent by CPU 18 to tele-text receiving portion 2 via I/F portion 21. Whereupon, that title display command is sent to IDT portion 12 by CPU 9 of tele-text broadcast receiving portion 2, and at the same time the above-mentioned display data is stored in shared memory 8 and above-mentioned title display is done on the screen.

Here, from among the keys of function key group 28 of RKP 4, such as "Bet," "Inquiry," "Display," etc., the "Bet"

key is pushed and, upon inputting a remote control signal from RKP 4 into CPU 18 via I/F portion 14 or the photoreceptor portion of horserace betting control portion 3 (Step ST 2), the betting sub-routine of ROM 19 is started. Then a decision as to whether it is presently in the midst of betting activity or not is made (Steps ST 3, ST 4) and if not in the midst of betting activity, a decision is made as to whether the initial betting settings have been completed or not (Step ST 5). In other words, in cases where there is a "betting possible" state at the horserace betting control portion 3, it proceeds to the "betting A" sub-routine shown in Figure 6. If it is not in that state, display processing for "track name" selection and display processing for track name (name of track where race is held) and sales category ([bet] sales for today's races, tomorrow's races) are done. For example, track name display data stored in ROM 19 is transferred to tele-text broadcast receiving portion 2 via I/F portion 21, and a "track name selection" command is outputted. That display data is stored in shared memory portion 8, the command is inputted to IDT portion 12, and as shown in Figure 14, a "betting screen" is displayed on the [television] screen showing the racetrack names, sales categories, etc. (Step ST 7). Here, following the messages in the lower part of the display screen, for example in the case of selecting "Tokyo Racetrack" and "today's race sales," the number "6" key of the "purchasing key group" 29

of RKP 4 is pushed, followed by the "#" key (Step ST 8).
Whereupon, display control processing is done by CPU 18,
according to the selection and, as shown in Figure 15, the
part of the display showing "6, Tokyo" changes color, so
that it can be distinguished from other parts. Next, upon
pushing the number "1" key followed by the "#" key (Step
ST 8), in the same way as described above, an initial
setting for purchase of horserace betting slips for today's
races at Tokyo Racetrack is made, and [the system] proceeds
to "betting A" sub-routine.

In this way, by operating RKP 4 following the screen display, the initial settings for betting are completed by CPU 18 of horserace betting control portion 3, and it becomes possible to display the specified race track, which will be explained later, the betting [situation] on the horses in the specified race and information on the horses in the specified race (i.e. display of the betting input screen).

Next, as in the flow chart of Figure 6, upon completion of the above-mentioned initial settings, display processing of the betting input screen is done by horserace betting control portion 3 which enables normal betting (Step ST 9). In other words, as shown in Figure 16, one is asked for example about the type of bet (combination win, win, place)

for the race with the nearest deadline for purchase of betting slips. At this time, the race number can be changed by moving the cursor C by pushing the arrow key(s) of purchasing key group 29, for example, or by using the "+" or "-" keys of function key group 28. Here, if any one of the "Combination win," "Win," or "Place" keys of the purchasing key group 29 is pushed, display control processing will be done in response to the operation of that key, as shown in Figure 17, and "combination," "win," "place" etc. will be displayed on the screen. Also, according to that display, cursor C will move. Next, if a horse number is inputted by pushing the number keys "1" through "0," that number will be displayed and cursor C will move accordingly. Further, if the monetary amount of the horserace betting slip is inputted by operating number keys and the "10,000" or "1000" or "100" or "\" key in combination, calculation of a monetary amount and display processing will be done according to such key operation, and as shown in the same figure, that monetary amount (total, balance) will be displayed in a specified area of the screen. Furthermore, when bet type (combination win, win, or place) and a horse number are inputted, display processing for the forecasted payback rate and the popularity ranking is done based on the odds information of the latest horserace program of the tele-text broadcast currently being received. Along with the bet number and the monetary amount of the bet, the odds

and popularity ranking are displayed on the screen. case of purchasing a ¥10,000 bet for a "1-3" combination win, for example, one pushes the "Combination win" key of the purchasing key group 29, then pushes the "1" and "3" keys, and finally pushes the "1" and "10,000" and "\" keys. After a bet has been placed in this manner, a check is performed to make sure no horse has been scratched from the lineup of the race for which the bet has been placed (Step In the case where there are no scratches, a decision is made as to whether the balance of the money held as collateral has fallen to "0" or below (Step ST 12). If enough funds remain to enable purchase of that horserace betting slip, error detection is performed to verify that there are no mistakes in the betting combination (Step ST 13). If there are no mistakes in the bet, a check is made as to whether or not an additional bet is to be placed (Step ST 13). In other words, as shown in Figure 18, a decision is made as to whether or not the specified key (the "#" key) of function key group 28 has been pushed in accordance with the messages in the lower part of the display screen (Step ST 14). If the specified key operation has not been done, [the system] returns to Step ST 10 and another bet may be placed on the same race. In case one of the horses originally in the lineup for that race has been scratched, or in case the balance of the collateral held drops to "0" or below (for example, becoming negative), [the system]

returns to Step ST 10, redoing display processing of the input screen for betting, so that re-betting can be done.

Next, after pushing the "#" key, if the "Transmit" key of function key group 28 is pushed (Step ST 15), in accordance with the display screen shown in Figure 19, the transmission sub-routine shown in Figure 7 starts, while if the "Cancel" key is pushed (Step ST 16), the cancellation sub-routine shown in Figure 8 starts, and if the "Change" keys is pushed (Step ST 17), the change sub-routine shown in Figure 9 starts. In the case that none of these "Transmit," "Cancel," or "Change" keys has been pushed, [the system] returns to Step ST 2 and the above-described sub-routine shown in Figure 5 is executed.

Next, in the flow chart of Figure 8, if the "Cancel" key is pushed, a decision is made (Step ST 18) as to whether or not the betting data stored in above-mentioned RAM portion 15 has already been transmitted to the computer of the horserace betting slip sales center. In case the transmission has not yet been made, display control processing is done (Step ST 19) in accordance with the betting data, as shown in Figure 18, and a summary of the bet details is displayed on the screen. Here, to cancel the bet, the "#" key is pushed, in accordance with messages in the lower part of the display screen. In other words, upon

pushing the "#" key, after pushing the "cancel" key, processing to cancel the betting data and processing to cancel display of that data take place (Steps ST 20, ST 21), that betting data is erased from RAM portion 15, and as shown in Figure 19, the display relating to the bet is erased from the screen. Further, because this cancellation is very important, confirmation processing may be added, to perform a check when such cancellation processing is done. In the case that the bet which one wishes to cancel has already been transmitted to the promoter side, error display processing is performed (Step ST 22) and, for example, the message "already transmitted" is displayed on the screen. Next, after the cancellation processing and error display processing have been executed, [the system] returns to Step ST 2 and goes into a standby mode awaiting the pushing of a function selection ("Function") key.

Next, in the flow chart of Figure 9, when the "change" key is pushed, a decision is made (Step ST 23) as to whether or not [the system] is currently in the midst of bet placement. If a bet is being placed, display control processing of a "bet change" screen is done, as shown in Figure 20, and display control processing (color change) is done to designate the number of the subject race (Step ST 24). Here, "race number change" display processing is done by operating the "+" and "-" keys of the function key group 28 (Step ST 25), increasing or decreasing that race number,

and the input screen for betting on the race whose number has been selected is displayed on the screen. In addition, the actions for changing the race number are performed or, in the case of being in the midst of inputting a bet, [the system] returns to Step ST 14 and Steps ST 10 through ST 13 are repeated until inputting of that bet is completed in accordance with the messages in the lower part of the display screen. In other words, betting on several races can be done, or additional bets may be placed on the race currently being inputted. Moreover, confirmation of changes to the race number and bet displayed on the screen can be done. In this way, upon placing the desired bet, the data for that bet is stored temporarily in RAM portion 15. After inputting is completed (Step ST 14), upon pushing the abovementioned "Transmit" key (Step ST 15), the transmission subroutine starts.

Next, in the transmission sub-routine shown in Figure 7, upon pushing the "Transmit" key, a decision is made (Step ST 26) as to whether or not the member number (number of the subject at-home betting apparatus) has been inputted or not, and if it has not been inputted, display processing for "member number input screen" is performed, as shown in Figure 21 (Step ST 27). There, following the messages in the lower part of the display screen, the subject member number is inputted. For example, "1 2 3 4 5 6," are

successively inputted using the number keys (Step ST 28), whereupon "1 2 3 4 5 6" is displayed on the display screen, as shown in the same figure, and also registration of that number (storage in RAM portion 15) is done. That member number is compared to the number of the subject at-home betting apparatus and in the case of a mistake in inputting, an error decision is made (Step ST 29) and [the system] returns to Step ST 28 and waits for re-inputting of the member number. This is to prevent third parties from using the subject at-home betting apparatus. Furthermore, after power for the at-home betting apparatus is turned on, once the member number has been inputted, that number will thereafter be automatically displayed on the above-mentioned transmission display screen. Upon inputting an error-free member number in this way, as shown in Figure 22, display processing for the "subscriber ID number input screen" is done (Step ST 29). Upon inputting the subject ID number, in accordance with messages in the lower part of the display screen, for example successively pushing number keys " * * * * " (Step ST 31), the display for transmission appears on the screen, as shown in Figure 23. There, upon pushing the "Transmit" key of function key group 28, in accordance with messages in the lower part of the display screen, automatic dialing control processing is performed (Step ST 32) to enable communication with the horserace betting slip sales center. Whereupon, a dial signal is

transmitted from the subject at-home betting apparatus, via I/F portion 23 and NCU 16. Upon arrival of that dial signal a communication line is connected between the subject athome betting apparatus and that horserace betting slip sales center, and the data necessary for purchasing a betting slip is transmitted from the subject at-home betting apparatus via I/F portion 24, modem portion 17, and NCU 16. This data transmission may be done for example as a batch, in the packet format, and upon receipt of that packet data at the betting slip sales center, a transmission is made back to the subject at-home betting apparatus to the effect that the bet has been received. Upon receipt of that information via NCU 16, modem 17, and I/F portion 24, a decision is made as to whether that communication was normal or not (Step ST 33). If no communication errors have occurred in the abovementioned communication, a decision is made, based on the information transmitted from the horserace betting slip sales center, as to whether or not that horserace bet has been received in error (Step ST 34). If there has been no mistake, the bet receipt number from the betting slip sales center, the number of betting slips purchased, the monetary amount, a "transmission complete" [message], etc. are displayed on the screen (Step ST 34). On the other hand, if the decision is made that a communications error has occurred in Step ST 33, there may be cases, for example when the betting deadline has passed, when the bet communication

will not be accepted. In such cases, a message to the effect that there has been a communications error will be displayed on the screen (Step ST 36), and afterwards a decision will be made as to whether or not it is necessary to re-transmit the horserace bet data (Step ST 36). cases where the above-mentioned deadline has passed, resulting in a communications error, transmission is terminated without transmitting the data for that bet. Communications errors may occur due to various other reasons, and in cases where the bet data was not transmitted [correctly] to the horserace betting slip sales center, retransmission of the bet data will be started. In this way bets are received at the horserace betting slip sales center, or if that communication is terminated, it is treated as though transmission of the data needed for bet purchasing has been completed and [the system] returns to Step ST 2, in a standby state, waiting for operation of function key group 28.

Next, in the inquiry sub-routine shown in Figure 10, upon pushing the "Inquiry" key of function key group 28, display processing of the inquiry menus is done, as shown in Figure 24 (Step ST 39). When one of the menus is selected by pushing the number key and the "#" key, following the messages in the lower part of the display screen, a decision is made as to whether or not the member number has been

inputted (Step ST 40). In case the member number has not been inputted, as shown in Figure 21, display processing of "member number inputting screen" is done (Step ST 41) in the same way as in the case of the transmission sub-routine shown in Figure 7. Following the messages in the lower part of the display screen, the subject member number, for example "1 2 3 4 5 6," is inputted using the number keys (Step ST 42), whereupon "1 2 3 4 5 6" is inputted on the display screen (as shown in the same figure) and registration of that number is done. In case that member number has been mistakenly inputted, an error decision is made (Step ST 43), and [the system] returns to Step ST 42 and awaits re-inputting of the member number. Furthermore, after power for the subject at-home betting apparatus is turned on, once the member number has been inputted, that number will thereafter be automatically displayed on the above-mentioned transmission display screen. Upon inputting an error-free member number in this way, as shown in Figure 22, display processing for the "subscriber ID number input screen" is done (Step ST 44). Upon inputting the subject ID number, in accordance with messages in the lower part of the display screen, for example successively pushing number keys " * * * * " (Step ST 45), the member number and ID number are displayed on the screen, as shown in the same figure. There, upon pushing the "Inquiry" key of function key group 28, in accordance with messages in the lower part of the

display screen, automatic dialing control processing is performed (Step ST 46) to enable calling and communicating with the horserace betting slip sales center. Whereupon, a dial signal is transmitted from the subject at-home betting apparatus and that dial signal is sent to the horserace betting slip sales center via a telephone line. arrival of that dial signal at the horserace betting slip sales center, a communication line is connected between the subject at-home betting apparatus and that horserace betting slip sales center, and the inquiry data for a balance inquiry is transmitted from the subject at-home betting apparatus. At the horserace betting slip sales center, based on that balance inquiry data, balance information data is read from the member's specified registered account and transmitted. That balance information data is received and stored in RAM 15, and communication is completed (Step ST Whereupon, a decision is made as to whether that communication was normal or not (Step ST 48). If no communication errors have occurred, balance display processing is done (Step ST 49), as shown in Figure 25, based on above-mentioned balance information data. Also, in case "3, win" is selected, win inquiry data is sent from the subject at-home betting apparatus. Based on that data, the horserace betting slip sales center sends information data on the race number, horse number (combination win, win, place), monetary amount purchased, payback amount, etc. for

any wins among the betting slips purchased by that member. In this way, as shown in Figure 26, win display processing is done (Step ST 34), based on information data transmitted from the horserace betting slip sales center through the above-mentioned communication. On the other hand, in case it is determined that a communication error has occurred in Step ST 48, for whatever the reason, there may be cases where the communication cannot be accomplished. In those cases, a message is displayed on the screen to the effect that a communication error has occurred (Step ST 50), and afterward, a decision is made (Step ST 51) as to whether it is necessary to transmit the inquiry again. In case it is not necessary to transmit the inquiry data again, transmission is considered complete as it is, without performing transmission [again]. However, in case it is determined that it is necessary to re-transmit the inquiry data, communication is initiated as described above. completion of inquiry data transmission in this way, [the system] returns to Step ST 2 and is put in a standby state, awaiting operation of the function key group 28.

Next, in the display sub-routine of Figure 11, upon pushing the "Display" key of the function key group 28, a decision is made (Step ST 52) as to whether or not the teletext broadcast is being normally received. This is based on a reception status information signal inputted via I/F

portion 22. If there is normal signal reception at the tele-text broadcast reception portion 2, a decision is made, from the information of the horserace program of the teletext broadcast, as to whether or not a horserace is being held today (Step ST 53). Next, in the case that it is a racing day at that racetrack, a decision is made as to whether or not horserace information is being displayed on the screen (Step ST 54). If that display is not being done, display processing for the track name selection screen is done, as shown in Figure 27 (Step ST 55). This is because, in cases where display processing of various kinds of horseracing information, etc. has already been done, the initial settings for such displays will already have been made. There, display processing of the display menu screen is done (Step ST 57) by following the messages in the lower part of the screen, as shown in Figure 28, for example pushing the specified number key and next pushing the "#" key (Step ST 56). Furthermore, by following the messages in the lower part of the screen, for example pushing the "1" number key and the "#" key (Step ST 58) [the system] is placed in the "odds information display mode," and if for example the "Combination win" key is pushed, odds display processing (for example, the odds of a combination win in the 10th race) is done (Step ST 59), as shown in Figure 29. At this time, the combination win odds information displayed on the screen is based on the most recent data from the

tele-text broadcast horserace program. This is because, for fans, for example when purchasing horserace betting slips [i.e. placing bets], odds information is an extremely important criterion. Here, by operating the "+" key or "-" key of the function key group 28, the race number can be increased or decreased and race odds information is displayed on the screen according to [the race number selected by] this operation. In addition, if instead of pushing the "Combination win" key, "Win" or "Place" are pushed, odds information display processing will be done in accordance with that action, and as shown in Figure 30, odds information is displayed on the screen (Step ST 59) in the same way as display of the above-mentioned odds for a combination win.

In addition, in the above-mentioned Step ST 58, if number key "4" is pushed a "horse weight and scratches" display mode 6 is selected and, as shown in Figure 31, "horse weight and scratches" display processing is done (Step ST 59) for the subject race (for example, the tenth race). Shown on the screen is the weight of each horse in the tenth race and the difference in that weight compared to the horse's previous race. Moreover, in the same way as described above, if the "+" key or "-" key of function group 28 is pushed, the race number is increased or decreased and the weight of each horse [in that race] and weight

difference compared to previous race, etc. are displayed on the screen (Step ST 59) according to [the race number selected by] this operation. In addition, in abovementioned Step ST 58, by operating other number keys, for example based on information from the horserace program, display processing is performed according to the operation of those keys, and race results (the performance of the horses and the payback amounts), etc. are displayed on the screen (Step ST 59).

After performing this kind of display control processing, [the system] returns to Step ST 2 and waits for input via a function select key. That is, even when the above-described odds information, etc. is displayed on the screen, if any one of the "Bet," "Inquiry," "Display," keys of the function key group 28 is operated [pushed], [the system] will go into a new mode in response to that operation. On the other hand, in Step ST 52, if the teletext broadcast is not being received normally by the teletext broadcast receiving portion 2, error message display processing is done and a message is displayed on the screen as notification to that effect. In addition, in Step ST 53, in case a determination is made that it is not a race day, error message display processing is done and a message is displayed on the screen as notification to that effect. Moreover, along with that error message, the date of the

next race may be displayed. After performing error message display processing in this way, [the system] returns to Step ST 2 and waits for input via a function select key.

Next, in the "Betting A" sub-routine shown in Figure 6, upon pushing the "Odds / Bet" key of the function key group 28, as shown in Figure 32, display processing of [a] odds information based on the latest information of the horseracing program and [b] the betting screen will be performed, and the subject race (for example, combination win odds for the tenth race) will be displayed on the screen. Here, bets may be placed on horses in the subject race by operating number keys and the "#" key, following messages in the lower part of the screen. That is, by pushing the "1," "3," and "#" keys, the color of the "1 - 3" part [of the display] changes, as shown in the same figure. Additional bets on other horses, such as "2 - 3," etc. can also be inputted. Furthermore, by operating the "+" and "-" keys of the function key group 28, the race number is increased or decreased, and in response to that operation, the odds information for that race is displayed on the screen. In addition, if the "Win" or "Place" key is pushed, odds information display processing is done in response to that operation and, as shown in Figure 33, the win odds or place odds information is displayed on the screen, in the same manner as the above-mentioned display of "combination

win" odds. In this way, by returning to the bet input screen after the bet is inputted, the monetary amount of that bet, etc. can be inputted.

Furthermore, in Step ST 58 of the display sub-routine shown in above-mentioned Figure 11, if "1, odds" is selected, by pushing the "Odds / Bet" key of function key group 28, as shown in Figure 32, display processing for the odds/betting screen will be performed in the same way as described above. The subject race (for example, the "combination win" odds of the tenth race) is displayed on the screen and bets can be placed. Moreover, any type of bet, "combination win," "win," or "place," can be inputted for the desired race.

In this way, with "odds / betting", one can select horse numbers while viewing the odds screen and then can place bets by returning to the bet inputting screen and inputting the monetary amount to be purchased [i.e. to be bet]. Thus, by pushing the "Odds / Bet" key, one can move from the odds display screen to the odds / betting screen, or from the betting screen to the odds / betting screen. Likewise, to return to the odds screen from the odds / betting screen, the "Display" key is pushed, while to return to the betting screen from the odds / betting screen, the "Bet" key is pushed. In the example described above,

operation is generally as shown in the flow chart of Figure 12.

Because the data necessary for placing horserace bets on the desired race is transmitted as a batch in this way, the usage time of telephone lines is shortened and a larger number of members can purchase horserace betting slips.

(Effect of the Invention)

As described above, the at-home betting apparatus of the present invention has [a] a tele-text broadcast receiving function for receiving tele-text broadcasts and [b] a betting function which [i] displays on a television screen, also displaying that tele-text broadcast, horserace information (odds, etc. for each race), results of those races, bets, status of bets, etc. and [ii] by performing a transmission operation after betting operations are done on that display screen, transmits the data necessary for purchasing a horserace betting slip [i.e. placing a bet] to the horserace betting slip sales center, via a telephone line. As a result, when one places a bet at home, because transmission of the data for purchasing that betting slip is sent in one batch, for example in packet format, telephone line usage time is reduced and the number of at-home betting apparatuses which can be connected to a horserace betting slip sales center can be increased, so that more racing fans

can purchase betting slips. In addition, because with the present invention, the latest information from tele-text broadcasted horseracing programs is stored, the effect is that fans can obtain the latest racing information whenever they need it and can refer to this latest information in placing bets.

4. A Brief Description of the Drawings

Figure 1 is a summary block diagram of the at-home betting apparatus, showing one embodiment of the present invention.

Figure 2 is a front view of the RKP (Remote Key Pad) used in said at-home betting apparatus.

Figures 3 and 4 are front and rear views of said athome betting apparatus.

Figures 5 through 12 are flow charts for describing the operation of said at-home betting apparatus.

Figures 13 through 33 are diagrams of the display status of the television screen depending on the display processing of said at-home betting apparatus.

```
In the figures,
1 is the antenna
2 is the tele-text receiving portion
3 is the horserace betting control portion
4 is the RKP (Remote Key Pad; remote control)
5 is the tuner portion
6 is the DRT portion
7 is the RAM portion (of tele-text receiving portion 2)
8 is the shared memory portion
9 is the CPU (of tele-text receiving portion 2)
10 is the ROM portion (of tele-text receiving portion 2)
11 is the bus (of tele-text receiving portion 2)
12 is the IDT portion
13 is the RF modulator
14 is the photo-receptor portion and the I/F portion
15 is the RAM portion (of horserace betting control portion
3)
16 is the NCU (Network Control Unit)
17 is the modem portion
18 is the CPU (of horserace betting control portion 3)
19 is the ROM portion (of horserace betting control portion
3)
20 is the bus (of horserace betting control portion 3)
21, 22, 23, 24 are I/F portions
25 is the memory card
```

26 is the memory card connecting portion

Patent applicant: Fujitsu General, Ltd.

Agent: Attorney Takuya Ohara

KEY TO FIGURES

- a) Figure 1
- 3 Horserace betting control portion
- 5 Tuner portion
- 6 DRT portion
- 7,15 RAM portion
- 8 Shared memory portion
- 10 ROM portion
- 12 IDT portion
- 13 RF modulator
- b Printer output terminal 12a
- c Video output terminal (and 21-pin connector) 12b (12d)
- d Audio output terminal 12c
- e RF output terminal 13a
- f Tele-text broadcast receiving portion
- 17 Modem portion
- 19 ROM portion
- 21 I/F portion (for bus use)
- 22, 23, 24 I/F portion
- 25 Card
- 26 Memory card readout portion
- g Telephone line
- 14. Light receiving portion and I/F portion

a Figure 2

27

Telephone line	BGM	Channel	
[Illegible]		٨	v
Magazine	Сору	Stop/repeat	Table of
			Contents
Television	Tele-text broadcast [Illegible]	Fan B	Superimposed text/ sub-title [Illegible]

28

Program [Illegible]		Page	
+	_	<	>
Bet	Display	Odds / Bet	Inquiry
Transmit (Send)	Cancel	[illegible]	Change

29 [see original for numbers and symbols]

	Combination win	Win	Place
7	8	9	10,000
4	5	6	1000
1	2	3	100
*	0	#	¥

- b Figure 3
- 26a Card insertion slot
- c Figure 4
- la Antenna
- 12a Printer
- 12b Video
- 12c Audio
- 16a [Telephone] line
- a Figure 5
- b Turn on power
- ST 1 Title display

```
Function select
ST 2 Function select
ST 3 Execute bet?
ST 4 Execute inquiry?
d
     Bet
     Inquiry
e
f
     Display
ST 5 In the midst of betting?
ST 6 Bet [Illegible] establishing complete?
ST 7 Display betting screen
       • track name
       • sales category
          selection
ST 8
          Select
     Return to previous mode
q
h
     Bet A
i
     Figure 6
j
     Bet A
ST 9 Normal [Illegible] bet input
     Display the screen
ST 10 Input
     Combination win / win / place
     [illegible], monetary amount
ST 11
          Horse scratched?
ST 12
          Inquiry: [balance] 0 or below?
ST 13
          Communication error?
          Bet confirmation
k
ST 14
          Input complete?
ST 15
          Execute bet?
ST 16
          Terminate bet?
ST 17
          Change race?
1
          Transmit
m
          Cancel
          Change
n
          Function select
0
a
          Figure 7
b
          Transmit
ST 26
          Member number inputting complete?
          (inputted)
          Display member number input screen
ST 27
ST 28
          Input member number
ST 29
          Error?
```

```
ST 30
          Display ID number input screen
ST 31
          Input ID number
ST 32
          Automatic dial
ST 33
          Communication
d
          Center
ST 34
          Communication error?
ST 35
          Input error?
ST 36
          Display "OK"
          Confirm bet
ST 37
          Error display
ST 38
          Repeat execution?
f
          Function select
          Figure 8
a
          Cancel
b
ST 18
          Prior to transmission?
С
          (inputted)
ST 19
          Display a summary of bet details
ST 20
          Erase data
ST 21
          Display the cancel screen
d
          Function select
ST 22
          Error display
          Figure 9
e
f
          Change
ST 23
          In the midst of a bet?
ST 24
          Display betting screen
ST 25
          Change between race / betting modes
          Bet confirmation
g
          Figure 10
a
b
          Inquiry
ST 39
          Display the menu screen
ST 40
          Member number inputted?
          (inputted)
С
ST 41
          Display member number input screen
ST 42
          Input member number
ST 43
          Error?
ST 44
          Display ID number input screen
ST 45
          Input ID number
ST 46
          Automatic dial
ST 47
          Communication
d
          Center
ST 48
          Communication error?
ST 49
          Display the balance, etc.
```

```
Error display
ST 50
ST 51
          Repeat execution?
          Function select
e
          Figure 11
a
          Display
b
          Function select
С
ST 52
          Normal reception of tele-text broadcast?
ST 53
          Day of race?
ST 54
          Has this already been displayed?
ST 55
          Display track name selection screen
ST 56
          Select
ST 57
          Display menu screen
          Select
ST 58
ST 59
```

Display the following information:

- Combination win odds for this race
- Win / place odds for this race
- Advance sales combination win odds
- Advance sales win / place odds
- Odds on advance sales for next day's races [right column:]
- Horse weight, scratches (cancellations)
- Racing performance, payback amounts
- Weather, track condition
- Bracket order display
- ST 60 Error message
- ST 61 Error message
- d Function select
- 1 Figure 12
- 2 Bet
- 3 Function select
- 4 Inquiry
- 5 Track name selection screen Figure 14, Figure 15
- 6 Display
- 7 Track name selection screen Figure 27
- 8 Display
- 9 Inquiry
- 10 Bet
- 11, 11a Track selection
- 12 Betting screen Figure 16, Figure 17

- 13 Display menu screen Figure 28
- 14 Odds selection
- 15 Odds screen for combination win Figure 29
- 16 Win / place
- 17 Win (place) Odds screen Figure 30
- 18 Combination
- 19 Odds betting
- 20 Bet
- 21 Display
- 22 Odds betting
- 23 Combination win Odds betting screen Figure 32
- 24 Win / place
- 25 Combination
- 26 Win (place)
 Odds / betting screen
 Figure 33
- 1 Figure 13
- Bet, inquiry, display Select by key.
- 3 Figure 14
- 4 Betting
 - a) Track name
 - 1. Sapporo
 - 2. Hakodate
 - 3. Niigata
 - 4. Fukushima
 - 5. Nakayama
 - 6. Tokyo
 - 7. Chukyo
 - 8. Kyoto
 - 9. Hanshin
 - 10. Ogura
 - b) Sales category
 - 1. Sales for today's races
 - 2. Advance sales
 - c) Please select a track name.

- 5 Figure 15
- 6 Betting
 - a) Track name
 - 1. Sapporo
 - 2. Hakodate
 - 3. Niigata
 - 4. Fukushima
 - 5. Nakayama
 - 6. Tokyo
 - 7. Chukyo
 - 8. Kyoto
 - 9. Hanshin
 - 10. Ogura
 - b) Sales category
 - 1. Sales for today's races
 - 2. Advance sales
 - c) Please select a sales category.
- 1 Figure 16
- Tokyo tenth race normal
 bet type number monetary amount ¥ Odds
 Popularity

Total Balance ¥350,000 Please input a bet type.

- 3 Figure 17
- 4 Tokyo tenth race normal current time: 11:41
- a Consecutive win
- b Single
- c multiple
- d Total 195,000 Balance ¥350,000 Please press "bet type" or function key.
- 5 Figure 18
- 6 Tokyo tenth race normal
- a Consecutive win
- b Single
- c multiple
- d Total 195,000 Balance ¥350,000 Please press the # key.

- 1 Figure 19
- 2 Tokyo tenth race normal

Please press a function key.

- 3 Figure 20
- 6 Tokyo tenth race normal
- a Combination win
- b Win
- c Place
- d Total 195,000 Balance ¥350,000 Please enter the race number.
- 5 Figure 21
- 6 Transmit

Member number 123456

Please enter member number.

- 1 Figure 22
- 2 Transmit

Member number 123456

ID number ****

Please enter ID number.

- 3 Figure 23
- 4 Transmit

Receipt number Number of slips purchased: 1,950

Total 195,000¥ Balance ¥155,000

Please push a function key.

- 5 Figure 24
- 6 Inquiry menu
 - Today's betting history [Illegible]
 - 2. Balance
 - 3. Wins

Please select a menu.

- 1 Figure 25
- 2 Inquiry ·

Your balance is ¥155,000.

Please press a function key.

3 Figure 26

Win "Big Win!!"

Tokyo 8th race 3 - 4 [combination win] ¥100,000

Payback rate 8.7

Payback amount: ¥870,000

- 5 Figure 27
- 6 Display

Track name:

- 1. Tokyo
- 2. Kyoto
- 3. Fukushima
- 4. Nihon Derby ([illegible] race name)
- 5. Emperor's Cup ([illegible] race name)

Please enter the number of the track name.

- 1 Figure 28
- 2 Display menu
 - 1. Odds
 - 2. bracket
 - 3. Competitive performance, payback amount
 - 4. Weights of horses, scratches
 - 5. Weather, track condition

Please select a menu.

- 3 Figure 29
- 4 Tokyo 10th race Combination win Current time: 11:41
- 5 Figure 30
- 6 Tokyo 10th race Win Current time: 11:41
- 1 Figure 31
- 2 Tokyo 10th race Weights of horses Clear weather/grass/good condition
- 3 Figure 32
- 4 Tokyo 10th race Current time: 9:23
 - a) please select a combination.
- 5 Figure 33
- 6 Tokyo 10th Race Current time: 9:23
 - b) Please select a horse number.

- (72) Inventor Junichi Hashimoto c/o Fujitsu General
 Suenaga 1116, Takatsu-Ku,
 Kawasaki-shi,
 Kanagawa-ken, Japan
- (72) Inventor Kenichi Yamane c/o Fujitsu General
 Suenaga 1116, Takatsu-Ku,
 Kawasaki-shi,
 Kanagawa-ken, Japan
- (72) Inventor Masahiko Inami c/o Fujitsu General
 Suenaga 1116, Takatsu-Ku,
 Kawasaki-shi,
 Kanagawa-ken, Japan

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
FADED TEXT OR DRAWING
BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
☐ GRAY SCALE DOCUMENTS
☐ LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
□ other:

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.